

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number
WO 2005/038175 A1

(51) International Patent Classification⁷: **E05B 59/00**,
63/00, 65/00, 65/06, 47/00, 47/02, 15/00, E05C 9/00

(74) Agent: **F B RICE & CO**; 605 Darling Street, Balmain,
NSW 2041 (AU).

(21) International Application Number:
PCT/AU2004/001325

(22) International Filing Date:
27 September 2004 (27.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003905640 16 October 2003 (16.10.2003) AU

(71) Applicant (for all designated States except US): **DAZ
LOCK PTY LTD** [AU/AU]; A.C.N. 096 220 549, 17
Teemer Street, Gladesville, New South Wales 2111 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **O'NEILL, Daniel,
Maurice** [AU/AU]; 17 Teemer Street, Gladesville, New
South Wales 2111 (AU). **O'NEILL, Darren, Maurice**
[AU/AU]; 16 Fullarton Street, Dundas, New South Wales
2117 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A SECURITY LOCK ARRANGEMENT

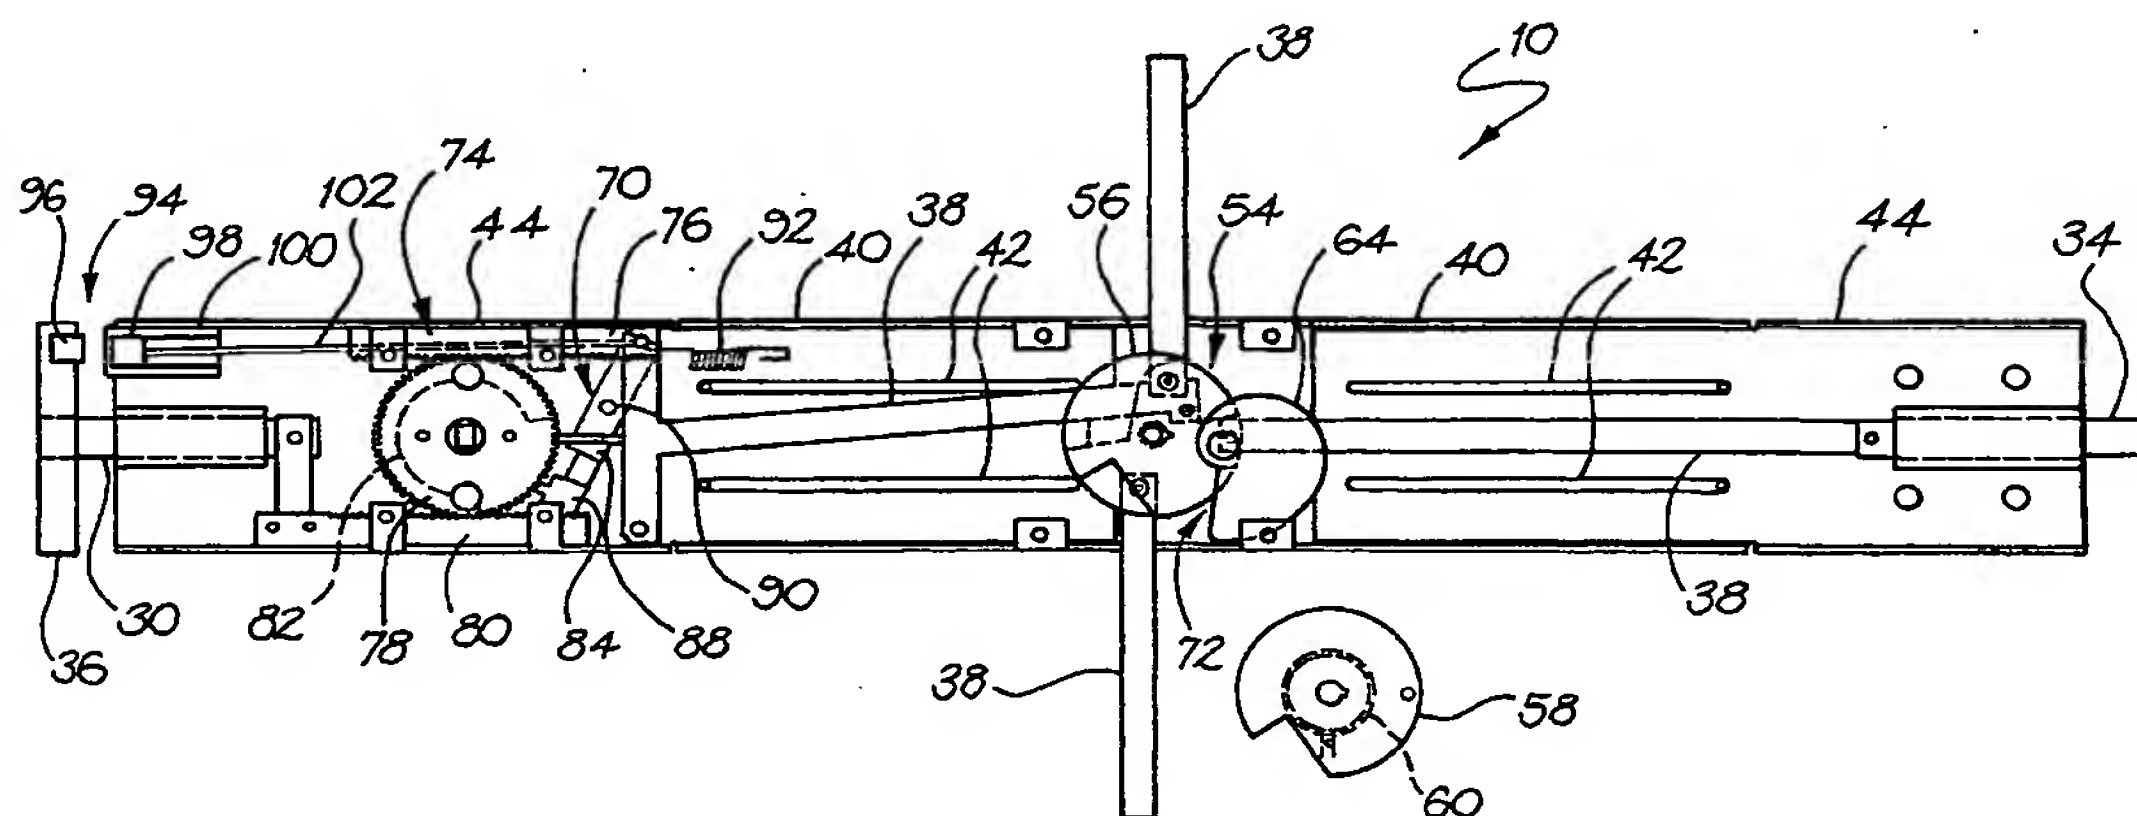

(57) Abstract: A security lock arrangement (10) includes a carrier (40) to be mounted on a wing member. At least one latch bolt (28-34) is displaceably arranged relative to the carrier (40) between a retracted, unlocked position and an extended, locked position. An urging means (60) acts on the at least one latch bolt (28-34) for urging the latch bolt (28-34) to its extended, locked position. A drive means is mounted on the carrier (40) for driving the at least one latch bolt (28-34) at least into its retracted position against the action of the urging means (60). A displacement mechanism is interposed between the drive means and the at least one latch bolt (28-34), the displacement mechanism comprising a cam member (64) rotatably driven by the drive means, the cam member (64) acting on a follower of the at least one latch bolt (28-34), the cam member (64) having a maximum throw when the at least one latch bolt (28-34) is proximate its retracted position.